


Keystone Jack UTP CAT6

DHRUVA Connect Category 6, Unshielded Keystone Jacks are RJ45 8P 8C 50μ Jacks suitable for 22-26 AWG stranded and solid wires, compatible with both 110 and Krone punch down tool. They are capable of re termination. They are available in universal labels colour coded as per T568A and T568B wiring schemes and fit in high density keystone patch panels. It supports IEC 60603-7-4 and complies with ANSI/TIA/EIA-568-C.2 standards.

FEATURES


- The NEW design of RJ45 PIN help it more stable to insertion and pull during the installation work
- Futuristic design and elegant appearance
- Easily secures and snap-in on Faceplates and Patch Panels
- Available in multi colours
- Optimized for Gigabit Ethernet Performance
- Built with high-impact fire-retardant plastic housing 50-micro-inch gold-plated contacts to ensure longevity and corrosion resistant
- Orientation, 90-degree termination

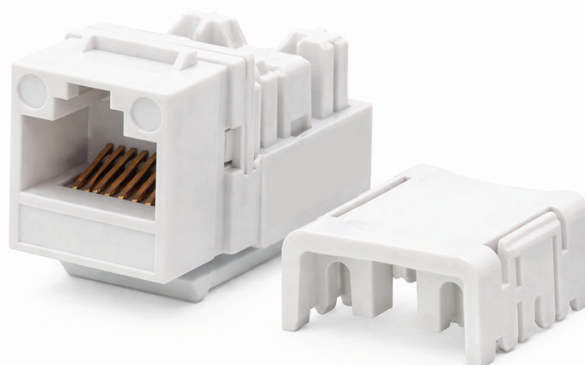

TECHNICAL SPECIFICATIONS

Rating	UL 94V-0 with optional colour
Transmission capacity	250 MHz
Termination type	Tool
RJ45 Jack Contact	Material- Phosphor bronze with Nickel plated
Finish	50μ - inch gold plated on plug contact area
Terminal	Phosphor bronze with TIN plated
IDC CAP	ABS, UL 94V-0
Insertion cycle	750 times
IDC Life	200 punching times Min.
Wire	AWG 22-26
Operating temperature	-40° C to 70° C
Storage temperature	-10° C to 80° C
Current rating	1.5A
Insulation resistance	≥ 100 Megaohms
Contact resistance variations	20 Milliohms
Insertion Force	20N (Max)
Retention Strength	7.7Kgs between Jack and Plug
Wiring scheme	T568A and T568B

Ordering Information

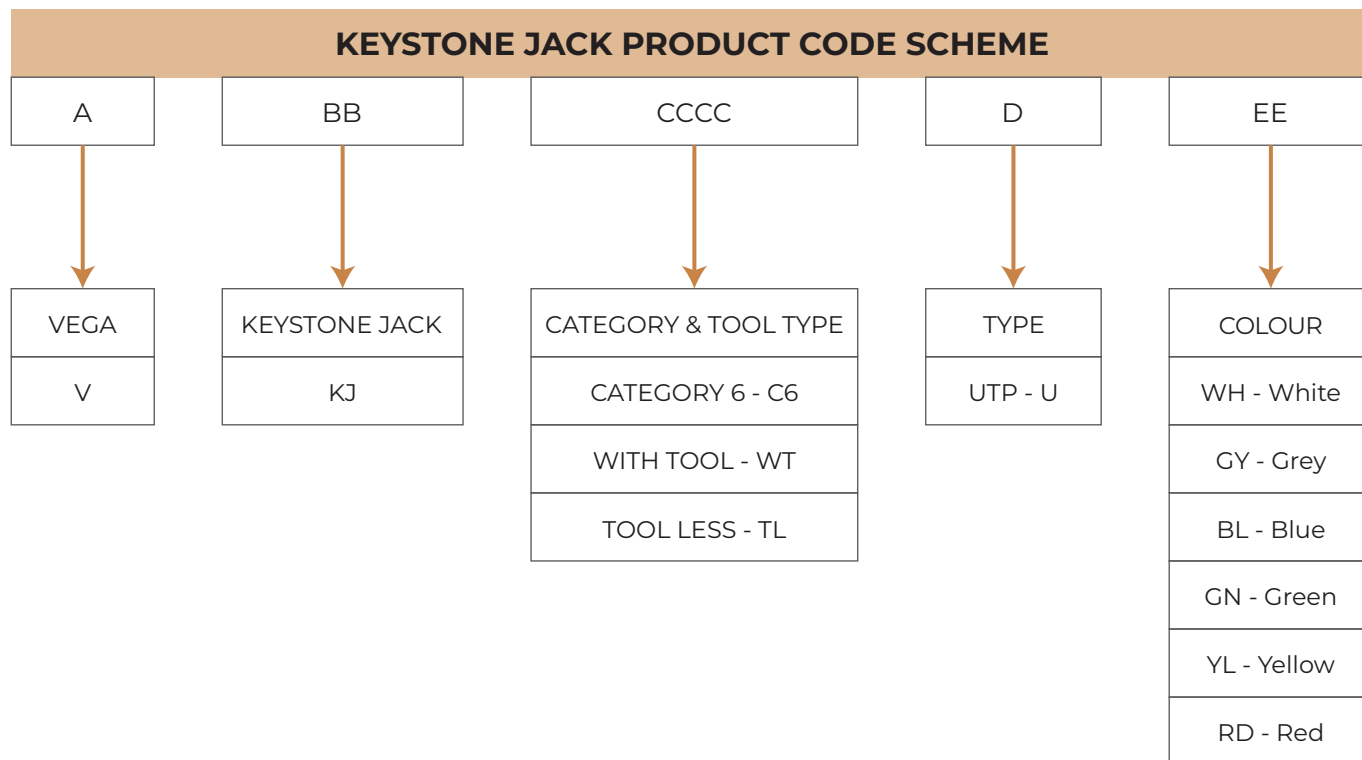

Part Number	Description
V-KJ-C6WT-U-WH	DHRUVA Connect Vega - UTP Category 6, Keystone Jack, 8P8C, White

ADVANCED FIBER SOLUTIONS PRIVATE LIMITED

#32, Kadagrahara Village, Gundur Main Road, Bidarahalli Hobli, Bengaluru-560049
 Helpline: +91 63628 42419 / 7676041473. Email: sales@dhruvaconnect.com.

